

HARDWIRING ASSEMBLY INSTRUCTIONS FOR Vivian Pendant

3574-22
3574-26

1.0

Model# 3574-22

3574-26


BEFORE STARTING- SHUT OFF BREAKER AT MAIN DISCONNECT

Make sure all power is disconnected at existing fixture and that there are no live wires in the junction box.

Not all junction boxes include simple wiring .If you are unsure or have doubts of electrical connection,call an electrician for assembly .
Remove all items from the packaging.


Step 1.

Unscrew the screw nut(B) and mounting plate(A) from canopy(C). Then place 8-shape cord(I) into the cord.

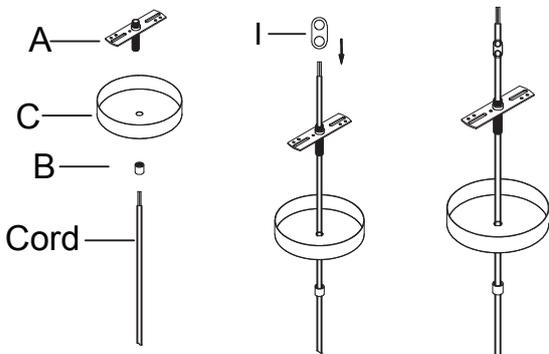


Step 3.

Place mounting plate(A) to ceiling. Align hole in mounting plate(A) with holes in junction box and secure with 2 screws(D) by a phillips head screwdriver.

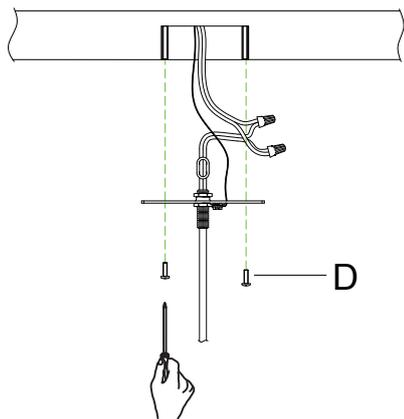

Step 5.


Socket ring(H) comes pre-assembled to the socket(F). Before placing the shade onto the socket, please unscrew this socket ring(H). Place shade(G) onto the socket(F), and tighten clockwise with socket ring(H) to secure shade.

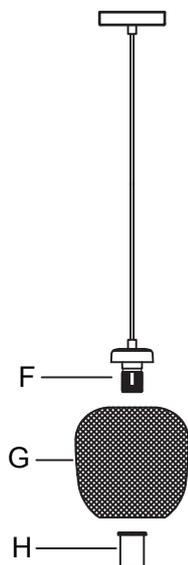

Step 2.


Twist both ground wire(copper or green) in junction box and in plate(A) to green grounding bolt. Cover the connected wires with wire nut (E).

Attach the neutral fixture wire (N) from the pendant to the neutral wire in junction box (usually white). Attach the hot fixture wire (L) from the pendant to the hot wire in junction box (usually black). Cover the connected wires with wire nut (E) - tighten each connection by turning clockwise.

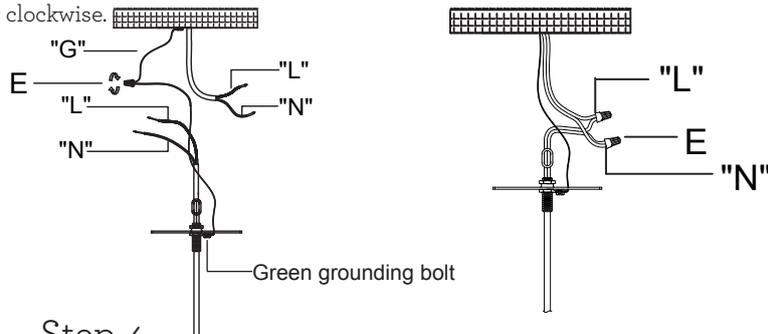

Step 4.

Push all wire connections into junction box. Push metal canopy(C) up so that it is touching the ceiling, followed by the screw nut(B) and turn the screw nut(B) clockwise to tighten.

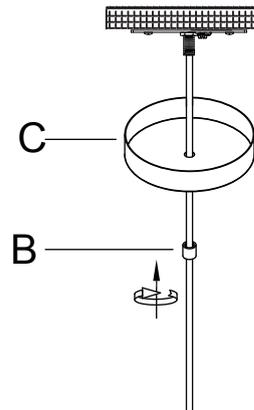

PARTS DIAGRAM:

- (3) Screws (D)
- (3) Wire nut (E)
- (1) 8-shape cord(I)

GENERAL PRODUCT INFORMATION:

This product is suitable for dry locations only.



IMPORTANT SAFETY INSTRUCTIONS:

This portable lamp has a polarized plug (one blade is wider than the other) as a feature to reduce the risk of electric shock. This plug will fit in a polarized outlet only one way. If the plug does not fit fully in the outlet, reverse the plug. If it still does not fit, contact a qualified electrician. Never use with an extension cord unless plug can be fully inserted. **DO NOT ALTER THE PLUG.**

BULB TYPE: (1) 100 watt incandescent or 23 watt CFL equivalent. (not included)